

OREGON CORNER RESTORATION FORM

Section: 16 & 17
Township: 6 North
Range: 34 East of the Willamette Meridian
County: Umatilla
Date: June 1, 2002

Corner Indexing Information: Township 6N Range 34E Corner Code J-K 9 (Willamette Meridian)

Additional Identifier: (e.g. BLM designation for the corner, street intersection, plat name, block, lot, etc.)

This corner is common to sections 16 & 17.

Oregon Plane Coordinates: N: 856858.482 E: 8690136.038

Zone: North **Order:** second **Datum:** NAD83-91 **Convergence:** 1°21'43.2" **Scale Factor:** .99997352

Previous Renewals/Surveys, etc: This corner was originally set by U.S. Deputy Surveyors William Odell and William Lewis under their contract No. 110 dated February 7, 1865. The Surveyor General's notes state "To state Boundary Line p.35 chains west of 18th mile post, set post corner for fractional section 16 and 17, drove charred stake, dug pits and raised mounds per instructions." As shown on County Survey No. Q-814-B, dated February 1946, C.H. Storms found a stone with an "X", no history on the origin of this stone could be found.

Monument(s) & Accessories Found (Condition & Source):


Intersection of West Line Section 16 and State Line found a Basalt stone with an "X" 10"x8"16". Found 1" pipes on North and South side (removed).

Monument Set (Procedures & Description):

At the location of the found stone, set 1" x 30" flared end Galvanized Iron pipe with 2 1/2" brass cap stamped (see example below) 0.4 below the surface of the dirt 4.5 feet to the South of South edge of pavement. Buried inverted stone along NE side of monument.

2001
 LS 2360
 Washington
 +
 S17 S16
 T6N R34E

Monument Detail:

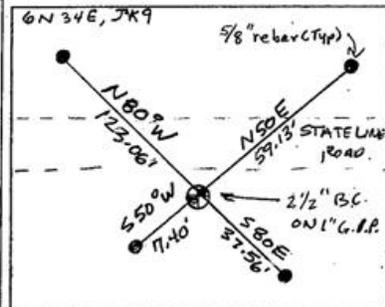

New Accessories: WE SET:

A 5/8 rebar with yellow plastic cap stamped 'Tomkins Surveying' which bears N 50°E ~ 59.13 feet from the corner. Set steel t-post along side and attached a Umatilla County Bearing Object Sign. A 5/8 rebar with yellow plastic cap stamped 'Tomkins Surveying' which bears S 80°E ~ 37.56 feet from the corner. Set steel t-post along side and attached a Umatilla County Bearing Object Sign. A 5/8 rebar with yellow plastic cap stamped 'Tomkins Surveying' which bears S 50°W ~ 7.40 feet from the corner. Attached a Umatilla County Bearing Object Sign to Rail Road Tie Fence Post. A 5/8 rebar with yellow plastic cap stamped 'Tomkins Surveying' which bears N 80°W ~ 123.06 feet from the corner. Set steel t-post along side and attached a Umatilla County Bearing Object Sign

Location & Comments:

Compass Declination:


19° East

Surveyor's Seal

Firm/Agency: Tomkins Land Surveying, Inc.
 20 E. Poplar, Suite 204
 Walla Walla, WA 99362



Paul W. Tomkins



Party Chief: Bryan Martin
Notes: Bryan Martin
Witness: Eric Flowers

renews 6/30/04
6/30/02

03-23-C