


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

N/A

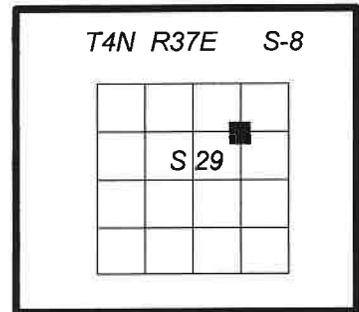

**Description of corner evidence found:**

N/A

**Description of monument and accessories I established to perpetuate original location of this corner:**

At the intersection point, I set a 3 1/4 inch diameter aluminum cap on a 2 1/2 inch aluminum pipe, with DEEP-1 magnet at base, 34 inches in the ground, mkd: as shown.

From which:

An 8 inch spruce mkd: NE 1/16 S29 BT, bears S86°W, 41.28 feet to a 3/4 inch brass tag mkd: LS 91201 in right side center.

A 9 inch tamarack mkd. NE 1/16 S29 BT, bears N13°W, 19.49 feet to a 3/4 inch brass tag mkd: LS 91201 in right side center.

A 6-foot steel T-post was set 1.0 foot West of the monument.

A 6-foot steel T-post was set 3.0 feet South of the monument.


CORS 2011 geographic position:

Lat. 45°47'53.934" N

Long. 118°13'01.141" W

I hereby certify that the corner was monumented using GPS RTK, and the accessories taken using a Warren-Knight staff compass and steel chain, on June 25, 2024.

Witness: David Quittschreiber and Shar Quittschreiber

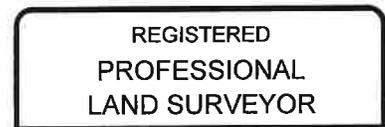

*Kristina Powell*



EXPIRES 12-31-24