

OREGON CORNER RESTORATION FORM

Section: 14, 15, 22 & 23
Township: 6 North
Range: 34 East of the Willamette Meridian
County: Umatilla
Date: June 1, 2002

Corner Indexing Information: Township 6N Range 34E Corner Code N 17 (Willamette Meridian)

Additional Identifier: (e.g. BLM designation for the corner, street intersection, plat name, block, lot, etc.)

This corner is common to sections 14, 15, 22 & 23.

Oregon Plane Coordinates: N: 853683.333 E: 8700773.051

Zone: North **Order:** second **Datum:** NAD83-91 **Convergence:** 1°23'29.3" **Scale Factor:** .99996828

Previous Renewals/Surveys, etc.: This corner was originally set by U.S. Deputy Surveyors William Odell and William Lewis under their contract No. 110 dated February 7, 1865. The Surveyor General's notes state "set post corner, drove charred stake, dug pits and raised mounds per instructions". Brady, in 1915, found the stake and set a stone (Co. Surveyor Book 2, page 274). Criger, in 1951, found the stone (Q-1618-AX). Bartleson, in 1990, held a 60d nail for the corner (Survey 91-12-B). Tomkins Land Surveying, in 1991, found the stone and set a brass cap and monument case.

Monument(s) & Accessories Found (Condition & Source):


At the southwest corner of section 14, T6N R34E, found a basalt stone with a "x" in a PVC and aluminum monument case, 8" from the sub-surface gravel (stone) and 4" from the sub-surface gravel (monument lid).

Monument Set (Procedures & Description):

Drove 2-5/8"x15" iron rebar along south side of stone. Filled the monument case with concrete and set 2" brass disc on top of rebar at 1/2" below the concrete surface and 4" below the gravel surface. Stamped (see example below)

T6N R34E
 LS 2360
 S15 S14
 S22 S23
 2001

Monument Detail:

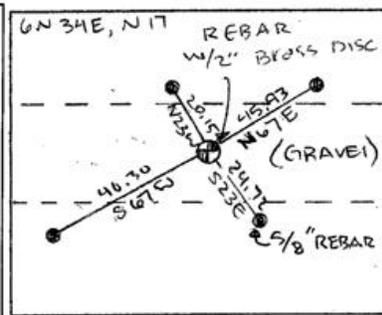

New Accessories: WE SET:

A 5/8 rebar with yellow plastic cap stamped 'Tomkins Surveying' which bears N 67°E ~ 45.93 feet from the corner. Attached a Umatilla County Bearing Object Sign to Southwest face of the Power Pole Post. A 5/8 rebar with yellow plastic cap stamped 'Tomkins Surveying' which bears S 23°E ~ 24.72 feet from the corner. Attached a Umatilla County Bearing Object Sign to t-post. A 5/8 rebar with yellow plastic cap stamped 'Tomkins Surveying' which bears S 67°W ~ 40.30 feet from the corner. Attached a Umatilla County Bearing Object Sign to t-post. A 5/8 rebar with yellow plastic cap stamped 'Tomkins Surveying' which bears N 23°W ~ 20.15 feet from the corner. Attached a Umatilla County Bearing Object Sign to t-post.

Location & Comments:



Compass Declination:

19° East

Firm/Agency: Tomkins Land Surveying, Inc.
 20 E. Poplar, Suite 204
 Walla Walla, WA 99362

Party Chief: Bryan Martin
Notes: Bryan Martin
Witness: Eric Flowers

Surveyor's Seal

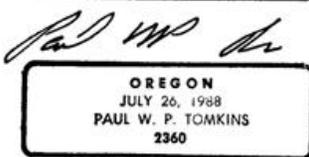

renews 6/30/04
6/30/02

03-23-C